

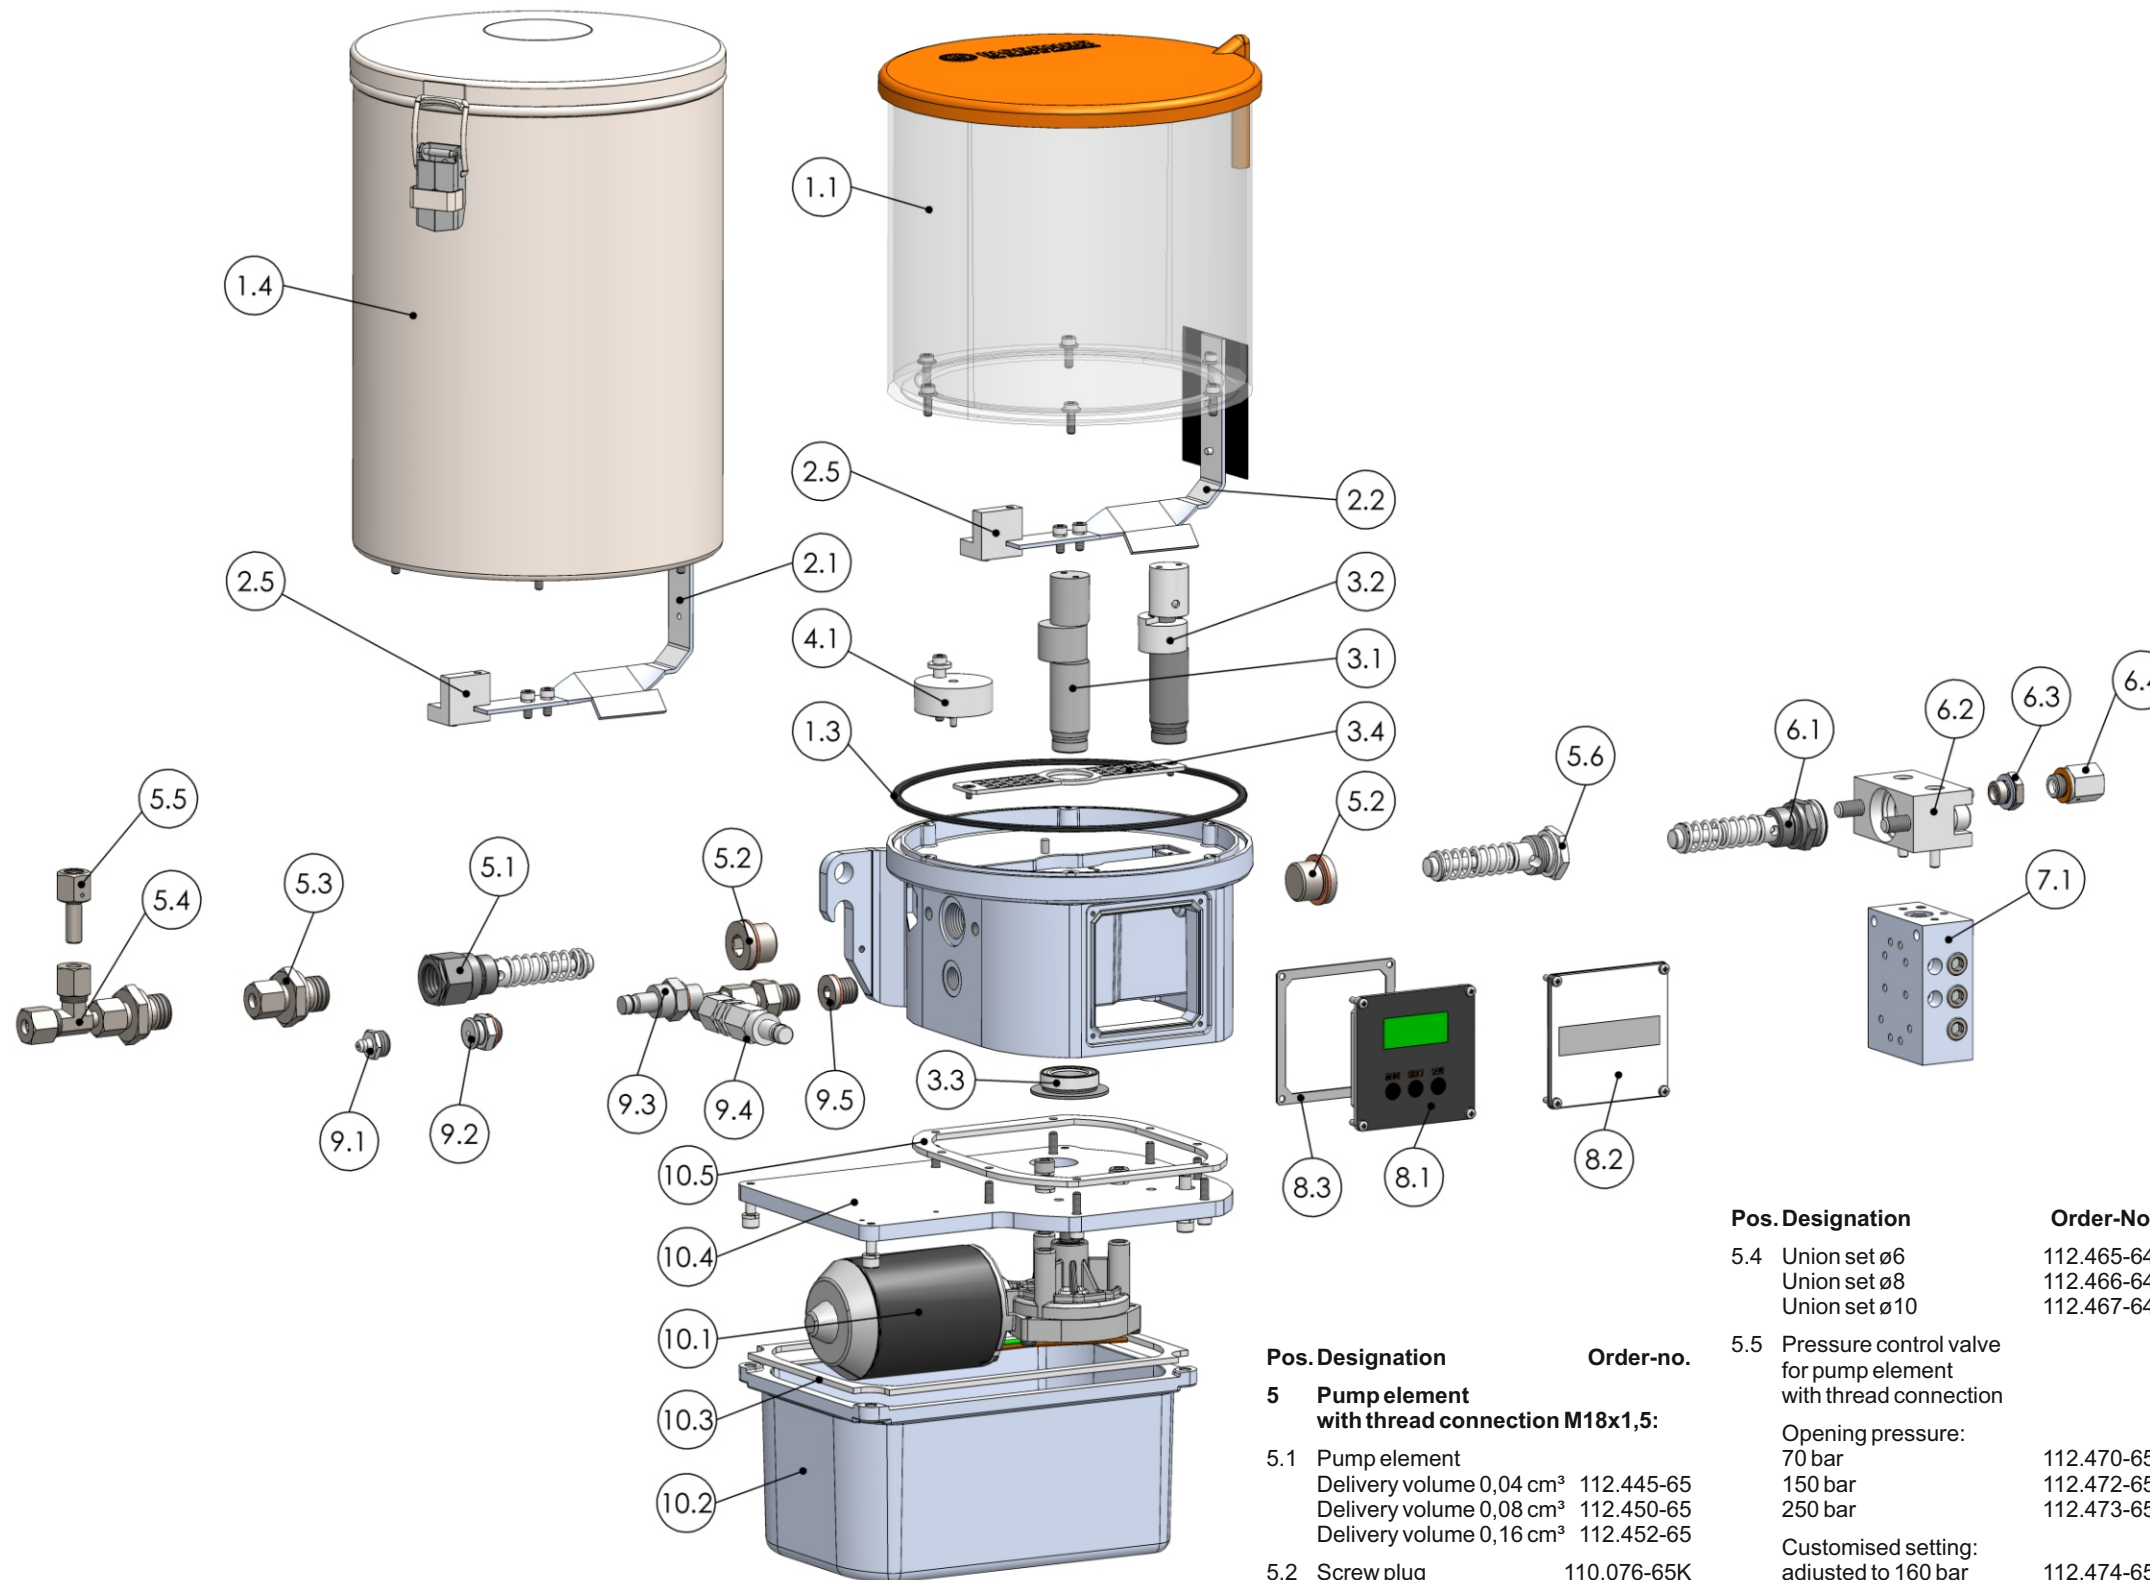
**Pump unit
GMG-B
Spare parts**

- Subject to modifications -



Pos. Designation Order-no

1 Reservoir:	
1.1 Reservoir 4P incl. pos. 1.3	112.432-64
Reservoir 2 incl. pos. 1.3	112.210-66K
Reservoir 1,5 incl. pos. 1.3	112.430-64
1.3 O-ring	915.202-75
1.4 Reservoir 7V with O-ring	110.513-65K
2 Stirrer blade with level control for grease:	
2.1 Stirrer blade 7l without indicator contact pos. 2.5 with indicator contact pos. 2.5	112.507-64 112.508-64
2.2 Stirrer blade 1,5l without indicator contact pos. 2.5 with indicator contact pos. 2.5	112.503-64 112.506-64
Stirrer blade 2l + 4l without indicator contact pos. 2.5 with indicator contact pos. 2.5	112.502-64 112.479-64


Pos. Designation Order-no

3 Eccentric: incl. pos. 3.3	
3.1 Eccentric for drive 3	112.424-64
3.2 Eccentric unit for drive 3A	112.425-64
3.3 Shaft-sealing ring with circlip	112.428-64
3.4 Covering sheet	112.423-64
4 Level control for oil:	
4.1 Level control "F"	112.480-64

Pos. Designation Order-no

5 Pump element with thread connection M18x1,5:	
5.1 Pump element Delivery volume 0,04 cm ³ Delivery volume 0,08 cm ³ Delivery volume 0,16 cm ³	112.445-65 112.450-65 112.452-65
5.2 Screw plug	110.076-65K
5.3 Straight fitting ø8 Straight fitting ø10	951.103-90 951.103-91

Pos. Designation Order-No.

5.4 Union set ø6 Union set ø8 Union set ø10	112.465-64 112.466-64 112.467-64
5.5 Pressure control valve for pump element with thread connection	
Opening pressure: 70 bar 150 bar 250 bar	112.470-65 112.472-65 112.473-65
Customised setting: adjusted to 160 bar adjusted to 450 bar	112.474-65 112.475-65
5.6 Spring loaded plunger	112.476-64

Pos. Designation Order-no.

6 Pump element for progressive distributor:	
6.1 Pump element Delivery volume 0,08 cm ³ Delivery volume 0,16 cm ³	112.454-65 112.456-65
6.2 Adapter for VPB incl. pos. 6.3	
Year of production until 2014 with fixing M6	112.381-65K
Year of production from 2015 with fixing M8	112.458-64
6.3 Screw plug	110.063-65K
6.4 Pressure control valve for pump element progressive distributor	
Opening pressure: 70 bar 150 bar	110.566-65 110.564-65
Customised setting: adjusted to 160 bar	110.568-65
7 Progressive distributor:	
7.1 P0 P1 P2 P3 P4 P5	VPB-G/6/0/20 VPB-G/6/R0/20 VPB-G/8/0/20 VPB-G/8/R0/20 VPB-G/4/0/20 VPB-G/4/R0/20

8 Control unit:	
8.1 Control unit "C" incl. pos. 8.3	487.118-74K
8.2 Cover plate without control unit incl. pos. 8.3	487.118-64K
8.3 Seal	112.413-45

9 Filling connector:	
9.1 Cone lubrication nipple	871.412-14
9.2 Flat lubrication nipple	112.440-64
9.3 Quick release nipple straight	112.443-64
9.4 Quick release nipple angled	112.441-64
9.5 Screw plug	206.674-65K

10 Drive:	
10.1 Geared motor	948.090-06
10.2 Protective hood	112.462-45
10.3 Seal	112.382-35
10.4 Drive 24 VDC complete incl. position 10.1, 10.2, 10.3, 10.5	112.460-64
10.5 Seal	112.463-35